


EXOS™ CORVAULT™

DATA SHEET

Transforming Data Center Storage Exos CORVAULT

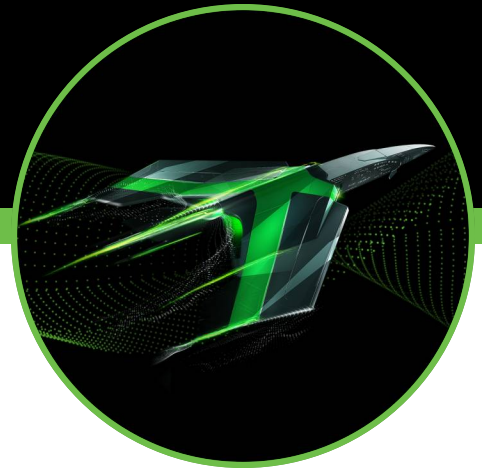

Seagate Exos® CORVAULT™ is a multi-petabyte capacity block storage system that is self-healing and brings five-nines availability to storage infrastructure and data center deployments. CORVAULT's breakthrough technology provides hyperscale efficiency, rapid deployment, and automatic hard drive renewal for less e-waste and operational costs.



Product Highlights

- Effortlessly deploy petabyte storage
- Lower TCO with maximum space utilization
- The most-efficient petabyte-capacity block storage
- Minimize Infrastructure costs and reduce data center carbon footprints
- Superior data availability, durability and performance
- Seagate Autonomic Distributed Allocation Protection Technology (ADAPT)
- Seagate Autonomous Drive Regeneration (ADR)
- Breakthrough Hard Drive Technology: Seagate Mozaic 3+™ in 4U106 models

Key Advantages

Hyperscale Efficiency: Lower on-premise infrastructure costs with intelligent controllers, and multi-petabyte capacity built into Exos CORVAULT.

Sustainability and Cost Savings: Exos CORVAULT has built-in data management, reducing your data center overhead, minimizing carbon footprint, and saving costs.

High Capacity Enclosures: Maximum data densities for optimal infrastructure space utilization.

Breakthrough Hard Drive Technology: Exos CORVAULT 4U106 uses Seagate Mozaic 3+ areal density technology, delivering more capacity for less power.

Superior Data Availability: Provides five-nines data availability and durability needed to promote reliable data storage with redundant hardware and distributed erasure coding.

System Data Protection: Protects data via Seagate Autonomic Distributed Allocation Protection Technology (ADAPT) for automatic uptime rebuilds without compromising performance, storage utilization, and availability.

Self-Healing Hard Drive: Autonomous Drive Regeneration (ADR) minimizes downtime, service intervention, and e-waste by renewing errant drives.


Simplicity: Allows simple installation, configuration, and management with GUI, CLI and Redfish API.

Grouped Disk Performance: Ensures continuous data access with responsive low latency performance.

Maximum Security: Self-encrypts data via Seagate Secure™ for maximum protection, reduced privacy concerns, and secure cryptographic erase.



| Specifications | EXOS CORVAULT 4U106 | |
|---|--|--|
| Standard Model Number | R4106I2000T002 | R4106I2500T002 |
| System Capacity (raw) | 2.0PB | 2.5PB |
| Limited warranty | 5 Years | 5 Years |
| System Performance | 12 GB/s sequential read throughput, 10 GB/s sequential write throughput | 12 GB/s sequential read throughput, 10 GB/s sequential write throughput |
| Device Support | Exos® self-encrypting hard drives with Mozaic 3+™ technology | Exos® self-encrypting hard drives with Mozaic 3+™ technology |
| System Data Protection | Seagate ADAPT erasure coding | Seagate ADAPT erasure coding |
| Disk Drive Self healing technology | Autonomous Drive Regeneration (ADR) | Autonomous Drive Regeneration (ADR) |
| Controllers | Redundant, active-active, VelosCT Controllers | Redundant, active-active, VelosCT Controllers |
| Hot-Swappable Components | Hard Drives, controllers, fans, power supplies, expander cards | Hard Drives, controllers, fans, power supplies, expander cards |
| Host I/O Ports | Four mini-SAS-3 HD ports on each controller | Four mini-SAS-3 HD ports on each controller |
| Physical | 4U: Height: 176.4mm / 6.94 in Width: 441mm / 17.36 in Depth: 1139 mm / 44.84 in Weight: 131.5kg / 290 lb | 4U: Height: 176.4mm / 6.94 in Width: 441mm / 17.36 in Depth: 1139 mm / 44.84 in Weight: 131.5kg / 290 lb |
| Management | | |
| Interface Types | 10/100/1000 Ethernet | 10/100/1000 Ethernet |
| Management Consoles | Web-based GUI or Command Line Interface (CLI) | Web-based GUI or Command Line Interface (CLI) |
| Management Software | Seagate Systems storage management console One-button configuration remote diagnostics nondisruptive updates | Seagate Systems storage management console One-button configuration remote diagnostics nondisruptive updates |
| Power Requirements—AC Input | | |
| Input Power Requirements | 200V-240V AC, 50Hz-60Hz | 200V-240V AC, 50Hz-60Hz |
| Power Consumption | Power supply max: 2000W operational: 1200-1600W (workload dependent) | Power supply max: 2000W operational: 1200-1600W (workload dependent) |
| Environmental/Temperature Ranges | | |
| Operating/Nonoperating Temperature | 5°C to 35°C (41°F to 95°F) / -40°C to +70°C (-40°F to +158°F) | 5°C to 35°C (41°F to 95°F) / -40°C to +70°C (-40°F to +158°F) |
| Operating/Nonoperating Humidity | -12°C DP/10 to 80% / -12°C DP/5 to 100% | -12°C DP/10 to 80% / -12°C DP/5 to 100% |
| Operating/Nonoperating Shock | 3.0 g, 11 ms (per axis) / 20.0 g, 7ms, 10 shock pulses, ISTA 3H | 3.0 g, 11 ms (per axis) / 20.0 g, 7ms, 10 shock pulses, ISTA 3H |
| Operating/Nonoperating Vibration | 0.18G _{rms} , 5 Hz to 500 Hz, 30 min per axis / 0.54G _{rms} 6Hz to 200 Hz (ISTA 3E) | 0.18G _{rms} , 5 Hz to 500 Hz, 30 min per axis / 0.54G _{rms} 6Hz to 200 Hz (ISTA 3E) |
| Standards/Approvals | | |
| Standard Marks/Approvals | United States, Canada, European Union (EU), Australia/New Zealand, Japan, China (PRC), Russia, Mexico, Germany, South Korea, Taiwan, India | United States, Canada, European Union (EU), Australia/New Zealand, Japan, China (PRC), Russia, Mexico, Germany, South Korea, Taiwan, India |
| Safety Certifications | UL 62368-1 CAN/CSA-C22.2 No.62368-1- 19 CE to EN 62368-1 CB IEC 62368-1 Power Supplies CCC & BIS | UL 62368-1 CAN/CSA-C22.2 No.62368-1- 19 CE to EN 62368-1 CB IEC 62368-1 Power Supplies CCC & BIS |
| Emissions (EMC) | FCC CFR 47 Part 15 Subpart B Class A ICES/NMB-003 Class A EN 55032:2015 Class A AS/NZS CISPR 22/CISPR 32 Class A VCCI Class A KN 32/KN 35 Class A CNS 15936 Class A | FCC CFR 47 Part 15 Subpart B Class A ICES/NMB-003 Class A EN 55032:2015 Class A AS/NZS CISPR 22/CISPR 32 Class A VCCI Class A KN 32/KN 35 Class A CNS 15936 Class A |
| Harmonics & Flicker | EN 61000-3-2 EN 61000-3-3 | EN 61000-3-2 EN 61000-3-3 |
| Immunity | EN 55032 KN 32/KN 35 | EN 55032 KN 32/KN 35 |
| Environmental Standards | The RoHS Directive (2011/65/EU) The WEEE Directive (2012/19/EU) The REACH Directive (EC) No. 1907/2006 and WFD Directive (EU) 2018/815 | The RoHS Directive (2011/65/EU) The WEEE Directive (2012/19/EU) The REACH Directive (EC) No. 1907/2006 and WFD Directive (EU) 2018/815 |
| Power Supply Units | Commission Regulation (EU) 2019/424 (Directive 2009/125/EC) | Commission Regulation (EU) 2019/424 (Directive 2009/125/EC) |
| Power Supply | Redundant Ecodesign (Model 700-014575-0800) – Platinum Power Efficiency 230VAC50/Hz; 10% Load = >80%; 20% Load = >90%; 50% Load = >94%; 100% Load = >91% Power Factor Conditions (PFC) 50% Loading = >0.90 | Redundant Ecodesign (Model 700-014575-0800) – Platinum Power Efficiency 230VAC50/Hz; 10% Load = >80%; 20% Load = >90%; 50% Load = >94%; 100% Load = >91% Power Factor Conditions (PFC) 50% Loading = >0.90 |
| Power Supply | Ecodesign (Model SPASGAT-02) – Titanium Power Efficiency 230VAC50/Hz; 10% Load = >90%; 20% Load = >94%; 50% Load = >96%; 100% Load = >91% Power Factor Conditions (PFC) 50% Loading = >0.95 | Ecodesign (Model SPASGAT-02) – Titanium Power Efficiency 230VAC50/Hz; 10% Load = >90%; 20% Load = >94%; 50% Load = >96%; 100% Load = >91% Power Factor Conditions (PFC) 50% Loading = >0.95 |



| Specifications | EXOS CORVAULT 4U106 | |
|---|--|--|
| Standard Model Number | R4106I212000001 R4106I2000S002 (EU version) | R4106I2500S002 |
| System Capacity (raw) | 2.1PB | 2.5PB |
| Limited warranty | 5 Years | 5 Years |
| System Performance | 12 GB/s sequential read throughput, 10 GB/s sequential write throughput | 12 GB/s sequential read throughput, 10 GB/s sequential write throughput |
| Device Support | Exos X20® self-encrypting SAS Hard Drives | Exos X24® self-encrypting SAS Hard Drives |
| System Data Protection | Seagate ADAPT erasure coding | Seagate ADAPT erasure coding |
| Disk Drive Self healing technology | Autonomous Drive Regeneration (ADR) | Autonomous Drive Regeneration (ADR) |
| Controllers | Redundant, active-active, VelosCT Controllers | Redundant, active-active, VelosCT Controllers |
| Hot-Swappable Components | Hard Drives, controllers, fans, power supplies, expander cards | Hard Drives, controllers, fans, power supplies, expander cards |
| Host I/O Ports | Four mini-SAS-3 HD ports on each controller | Four mini-SAS-3 HD ports on each controller |
| Physical | 4U: Height: 176.4mm / 6.94 in Width: 441mm / 17.36 in Depth: 1139 mm / 44.84 in Weight: 131.5kg / 290 lb | 4U: Height: 176.4mm / 6.94 in Width: 441mm / 17.36 in Depth: 1139 mm / 44.84 in Weight: 131.5kg / 290 lb |
| Management | | |
| Interface Types | 10/100/1000 Ethernet | 10/100/1000 Ethernet |
| Management Consoles | Web-based GUI or Command Line Interface (CLI) | Web-based GUI or Command Line Interface (CLI) |
| Management Software | Seagate Systems storage management console One-button configuration remote diagnostics nondisruptive updates | Seagate Systems storage management console One-button configuration remote diagnostics nondisruptive updates |
| Power Requirements—AC Input | | |
| Input Power Requirements | 200V-240V AC, 50Hz-60Hz | 200V-240V AC, 50Hz-60Hz |
| Power Consumption | Power supply max: 2000W Operational: 1400-1800W (workload dependent) | Power supply max: 2000W Operational: 1400-1800W (workload dependent) |
| Environmental/Temperature Ranges | | |
| Operating/Nonoperating Temperature | 5°C to 35°C (41°F to 95°F) / -40°C to +70°C (-40°F to +158°F) | 5°C to 35°C (41°F to 95°F) / -40°C to +70°C (-40°F to +158°F) |
| Operating/Nonoperating Humidity | -12°C DP/10 to 80% / -12°C DP/5 to 100% | -12°C DP/10 to 80% / -12°C DP/5 to 100% |
| Operating/Nonoperating Shock | 3.0 g, 11 ms (per axis) / 20.0 g, 7ms, 10 shock pulses, ISTA 3H | 3.0 g, 11 ms (per axis) / 20.0 g, 7ms, 10 shock pulses, ISTA 3H |
| Operating/Nonoperating Vibration | 0.18G _{rms} , 5 Hz to 500 Hz, 30 min per axis / 0.54G _{rms} 6Hz to 200 Hz (ISTA 3E) | 0.18G _{rms} , 5 Hz to 500 Hz, 30 min per axis / 0.54G _{rms} 6Hz to 200 Hz (ISTA 3E) |
| Standards/Approvals | | |
| Standard Marks/Approvals | United States, Canada, European Union (EU), Australia/New Zealand, Japan, China (PRC), Russia, Mexico, Germany, South Korea, Taiwan, India | United States, Canada, European Union (EU), Australia/New Zealand, Japan, China (PRC), Russia, Mexico, Germany, South Korea, Taiwan, India |
| Safety Certifications | UL 62368-1 CAN/CSA-C22.2 No.62368-1-19 CE to EN 62368-1 CB IEC 62368-1 Power Supplies CCC & BIS | UL 62368-1 CAN/CSA-C22.2 No.62368-1-19 CE to EN 62368-1 CB IEC 62368-1 Power Supplies CCC & BIS |
| Emissions (EMC) | FCC CFR 47 Part 15 Subpart B Class A ICES/NMB-003 Class A EN 55032:2015 Class A AS/NZS CISPR 22/CISPR 32 Class A VCCI Class A KN 32/KN 35 Class A CNS 15936 Class A | FCC CFR 47 Part 15 Subpart B Class A ICES/NMB-003 Class A EN 55032:2015 Class A AS/NZS CISPR 22/CISPR 32 Class A VCCI Class A KN 32/KN 35 Class A CNS 15936 Class A |
| Harmonics & Flicker | EN 61000-3-2 EN 61000-3-3 | EN 61000-3-2 EN 61000-3-3 |
| Immunity | EN 55032 KN 32/KN 35 | EN 55032 KN 32/KN 35 |
| Environmental Standards | The RoHS Directive (2011/65/EU) The WEEE Directive (2012/19/EU) The REACH Directive (EC) No. 1907/2006 and WFD Directive (EU) 2018/815 | The RoHS Directive (2011/65/EU) The WEEE Directive (2012/19/EU) The REACH Directive (EC) No. 1907/2006 and WFD Directive (EU) 2018/815 |
| Power Supply Units | Commission Regulation (EU) 2019/424 (Directive 2009/125/EC) | Commission Regulation (EU) 2019/424 (Directive 2009/125/EC) |
| Power Supply | Redundant Ecodesign (Model 700-014575-0800) – Platinum Power Efficiency 230VAC50/Hz; 10% Load = >80%; 20% Load = >90%; 50% Load = >94%; 100% Load = >91% Power Factor Conditions (PFC) 50% Loading = >0.90 | Redundant Ecodesign (Model 700-014575-0800) – Platinum Power Efficiency 230VAC50/Hz; 10% Load = >80%; 20% Load = >90%; 50% Load = >94%; 100% Load = >91% Power Factor Conditions (PFC) 50% Loading = >0.90 |
| Power Supply | Ecodesign (Model SPASGAT-02) – Titanium Power Efficiency 230VAC50/Hz; 10% Load = >90%; 20% Load = >94%; 50% Load = >96%; 100% Load = >91% Power Factor Conditions (PFC) 50% Loading = >0.95 | Ecodesign (Model SPASGAT-02) – Titanium Power Efficiency 230VAC50/Hz; 10% Load = >90%; 20% Load = >94%; 50% Load = >96%; 100% Load = >91% Power Factor Conditions (PFC) 50% Loading = >0.95 |



| Specifications | EXOS CORVAULT 5U84 | |
|---|--|--|
| Standard Model Number | R5U84I1500S001 | R5U84I2000S001 |
| System Capacity (raw) | 1.68PB | 2.02PB |
| Limited warranty | 5 Years | 5 Years |
| System Performance | 12 GB/s sequential read throughput, 10 GB/s sequential write throughput | 12 GB/s sequential read throughput, 10 GB/s sequential write throughput |
| Device Support | Exos X20® self-encrypting SAS HDDs | Exos X24® self-encrypting SAS HDDs |
| System Data Protection | Seagate ADAPT erasure coding | Seagate ADAPT erasure coding |
| Disk Drive Self healing technology | Autonomous Drive Regeneration (ADR) | Autonomous Drive Regeneration (ADR) |
| Controllers | Redundant, active-active, VelosCT Controllers | Redundant, active-active, VelosCT Controllers |
| Hot-Swappable Components | Hard Drives, controllers, fans, power supplies, expander cards | Hard Drives, controllers, fans, power supplies, expander cards |
| Host I/O Ports | Four mini-SAS-3 HD ports on each controller | Four mini-SAS-3 HD ports on each controller |
| Physical | 5U: Height: 222.3mm / 8.75 in Width: 444.5mm / 17.5 in Depth: 981mm / 38.63 in Weight: 135kg / 298 lb | 5U: Height: 222.3mm / 8.75 in Width: 444.5mm / 17.5 in Depth: 981mm / 38.63 in Weight: 135kg / 298 lb |
| Management | | |
| Interface Types | 10/100/1000 Ethernet | 10/100/1000 Ethernet |
| Management Consoles | Web-based GUI or Command Line Interface (CLI) | Web-based GUI or Command Line Interface (CLI) |
| Management Software | Seagate Systems storage management console One-button configuration remote diagnostics nondisruptive updates | Seagate Systems storage management console One-button configuration remote diagnostics nondisruptive updates |
| Power Requirements—AC Input | | |
| Input Power Requirements | 200V-240V AC, 50Hz-60Hz | 200V-240V AC, 50Hz-60Hz |
| Power Consumption | Power supply max: 2200W operational: 1200-1400W (workload dependent) | Power supply max: 2200W operational: 1200-1400W (workload dependent) |
| Environmental/Temperature Ranges | | |
| Operating/Nonoperating Temperature | 5°C to 35°C (41°F to 95°F) / -40°C to +70°C (-40°F to +158°F) | 5°C to 35°C (41°F to 95°F) / -40°C to +70°C (-40°F to +158°F) |
| Operating/Nonoperating Humidity | -12°C DP/10 to 80% / -12°C DP/5 to 100% | -12°C DP/10 to 80% / -12°C DP/5 to 100% |
| Operating/Nonoperating Shock | 3.0 g, 11 ms (per axis) / 20.0 g, 7ms, 10 shock pulses OR ISTA 3H | 3.0 g, 11 ms (per axis) / 20.0 g, 7ms, 10 shock pulses OR ISTA 3H |
| Operating/Nonoperating Vibration | 0.18Grms, 5 Hz to 500 Hz, 30 min per axis / 0.54Grms 6Hz to 200 Hz (ISTA 3E) | 0.18Grms, 5 Hz to 500 Hz, 30 min per axis / 0.54Grms 6Hz to 200 Hz (ISTA 3E) |
| Standards/Approvals | | |
| Standard Marks/Approvals | United States, Canada, European Union (EU), Australia/New Zealand, Japan, China (PRC), Russia, Mexico, Germany, South Korea, Taiwan, India | United States, Canada, European Union (EU), Australia/New Zealand, Japan, China (PRC), Russia, Mexico, Germany, South Korea, Taiwan, India |
| Safety Certifications | UL 62368-1 CAN/CSA-C22.2 No.62368-1-19 CE to EN 62368-1 CB IEC 62368-1 Power Supplies CCC & BIS | UL 62368-1 CAN/CSA-C22.2 No.62368-1-19 CE to EN 62368-1 CB IEC 62368-1 Power Supplies CCC & BIS |
| Emissions (EMC) | FCC CFR 47 Part 15 Subpart B Class A ICES/NMB-003 Class A EN 55032:2015 Class A AS/NZS CISPR 22/CISPR 32 Class A VCCI Class A KN 32/KN 35 Class A CNS 15936 Class A | FCC CFR 47 Part 15 Subpart B Class A ICES/NMB-003 Class A EN 55032:2015 Class A AS/NZS CISPR 22/CISPR 32 Class A VCCI Class A KN 32/KN 35 Class A CNS 15936 Class A |
| Harmonics & Flicker | EN 61000-3-2 EN 61000-3-3 | EN 61000-3-2 EN 61000-3-3 |
| Immunity | EN 55032 KN 32/KN 35 | EN 55032 KN 32/KN 35 |
| Environmental Standards | The RoHS Directive (2011/65/EU) The WEEE Directive (2012/19/EU) The REACH Directive (EC) No. 1907/2006 and WFD Directive (EU) 2018/815 | The RoHS Directive (2011/65/EU) The WEEE Directive (2012/19/EU) The REACH Directive (EC) No. 1907/2006 and WFD Directive (EU) 2018/815 |
| Power Supply Units | Commission Regulation (EU) 2019/424 (Directive 2009/125/EC) | |
| Power Supply | Redundant Ecodesign (Model 700-014575-0800) – Platinum Power Efficiency 230VAC50/Hz; 10% Load = >80%; 20% Load = >90%; 50% Load = >94%; 100% Load = >91% Power Factor Conditions (PFC) 50% Loading = >0.90 | Redundant Ecodesign (Model 700-014575-0800) – Platinum Power Efficiency 230VAC50/Hz; 10% Load = >80%; 20% Load = >90%; 50% Load = >94%; 100% Load = >91% Power Factor Conditions (PFC) 50% Loading = >0.90 |
| Power Supply | Ecodesign (Model SPASGAT-02) – Titanium Power Efficiency 230VAC50/Hz; 10% Load = >90%; 20% Load = >94%; 50% Load = >96%; 100% Load = >91% Power Factor Conditions (PFC) 50% Loading = >0.95 | Ecodesign (Model SPASGAT-02) – Titanium Power Efficiency 230VAC50/Hz; 10% Load = >90%; 20% Load = >94%; 50% Load = >96%; 100% Load = >91% Power Factor Conditions (PFC) 50% Loading = >0.95 |

© 2023 Seagate Technology LLC. All rights reserved. Seagate, Seagate Technology, and the Spiral logo are registered trademarks of Seagate Technology LLC in the United States and/or other countries. Exos, the Exos logo, and Seagate Secure are either trademarks or registered trademarks of Seagate Technology LLC or one of its affiliated companies in the United States and/or other countries. All other trademarks or registered trademarks are the property of their respective owners. When referring to drive capacity, one gigabyte, or GB, equals one billion bytes and one terabyte, or TB, equals one trillion bytes. Your computer's operating system may use a different standard of measurement and report a lower capacity. In addition, some of the listed capacity is used for formatting and other functions, and thus will not be available for data storage. Actual data rates may vary depending on operating environment and other factors, such as chosen interface and drive capacity. The export or re-export of Seagate hardware or software is regulated by the U.S. Department of Commerce, Bureau of Industry and Security (for more information, visit www.bis.doc.gov), and may be controlled for export, import, and use in other countries. Seagate reserves the right to change, without notice, product offerings or specifications. DS2058.4.2309US